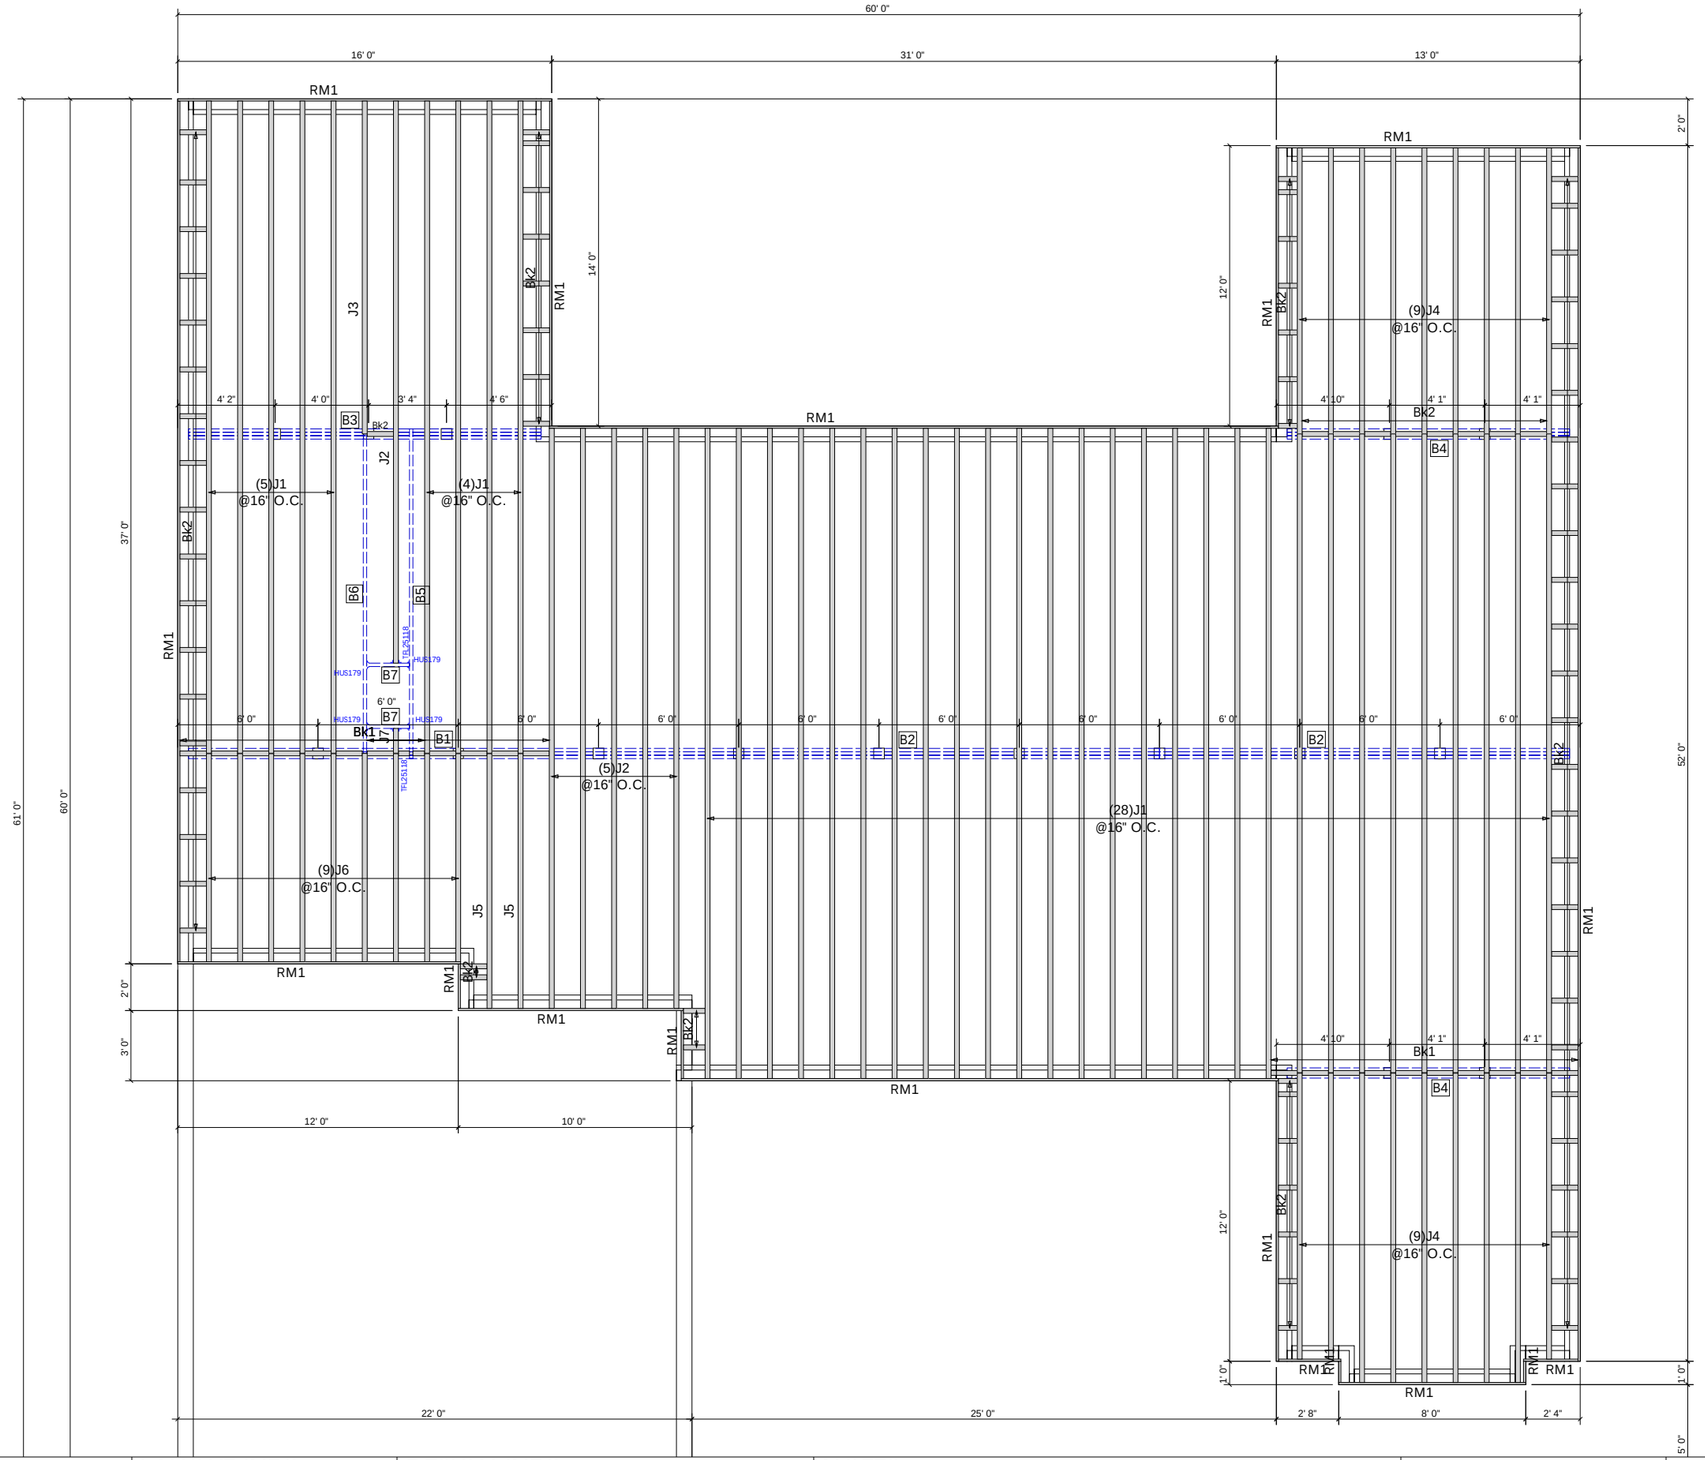

Products				
PlotID	Length	Product	Plies	Net Qty
B1	24' 0"	1 3/4"x9 1/2" (2.0E 3300) LVL	3	3
B2	18' 0"	1 3/4"x9 1/2" (2.0E 3300) LVL	3	6
B3	16' 0"	1 3/4"x9 1/2" (2.0E 3300) LVL	3	3
B4	14' 0"	1 3/4"x9 1/2" (2.0E 3300) LVL	3	6
B5	16' 0"	1 3/4"x11 7/8" (2.0E 3300) LVL	1	1
B6	14' 0"	1 3/4"x11 7/8" (2.0E 3300) LVL	1	1
B7	2' 0"	1 3/4"x11 7/8" (2.0E 3300) LVL	1	2
Bk1	25' 0"	11 7/8" PJI-40	1	1
Bk2	85' 0"	11 7/8" PJI-40	1	1
J1	28' 0"	11 7/8" PJI-40	1	37
J2	26' 0"	11 7/8" PJI-40	1	6
J3	16' 0"	11 7/8" PJI-40	1	1
J4	14' 0"	11 7/8" PJI-40	1	18
J5	12' 0"	11 7/8" PJI-40	1	2
J6	10' 0"	11 7/8" PJI-40	1	9
J7	2' 0"	11 7/8" PJI-40	1	1
RM1	12' 0"	1 1/8" x 11 7/8" APA Rim Board	1	22

Connector Summary		
Qty	Manuf	Product
4	MiTek	HUS179
2	MiTek	TFL25118

[redacted]

JOB INFO:

JOB#:	D2874
TAG:	Northern Vermont Project
ACCOUNT:	EZ SIPS
DESIGNER:	[redacted]
DATE:	[redacted]

LAYOUT INFO:

LEVEL:	1st Floor
DEPTH:	11-7/8"
SPACING:	16" O.C.
DECKING:	3/4" T&G
CEILING:	GYPSUM

DESIGN INFO:

CODE:	IBC 2018
TC LL:	40.000 lb/ft²
TC DL:	20.000 lb/ft²
BC DL:	10.000 lb/ft²
DEFLECTION:	L/480 & T/360

NOTES:

FRAMING ON SITE BY OTHERS

▽ TRUSS LEFT END INDICATOR CORRESPONDING WITH ENGINEERED DRAWINGS

DO NOT CUT, MODIFY, OR REPAIR COMPONENTS WITHOUT CONSULTING THE MANUFACTURER.

FOR QUESTIONS PLEASE CONTACT:
[redacted] BUILDING COMPONENTS
@ [redacted]

[redacted]

F1